



Features

- Good color rendering (80+ CRI)
- 3000K color temperature
- 260 lumens per foot performance
- Consumes up to 2.93 watts per foot
- Dimmable with ELV dimmers
- Cuttable every 1.97"
- 16.4 foot max run
- (IP54) unjacketed
- 50,000 hours rated life

Available CCT



3000K

Control Options

- Trulux Single Color Controls
 - Requires Adaptive Driver + Trulux Receiver
- Primary Side Dimming
 - Requires Standard Dimmer + Adaptive Driver
- Single Color In-line Control

Listing / Ratings




TRULUX™ Edge Lit - 24V

The Edge-lit series is a great grazing tool, whether it be for columns, back bars, reception areas or niches. Cast warm white light onto surfaces, bending around obstacles and corners easily and seamlessly thanks in part to its extremely low profile making for a great solution to installs with limited back lighting space.

Technical Information

Series	STEL
Input Voltage	24V
CCT	3000K
CRI	80+
Wattage	Up to 2.93W per ft
Lumens	260Lm per ft
Max Run	16.4 ft
Cuttable	Every 1.97 in
IP Rating	IP54 (unjacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

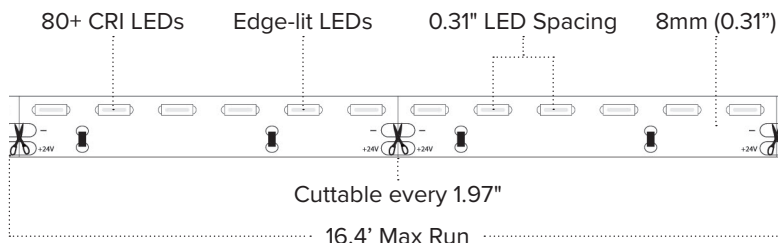

STEL SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
STEL-WW	24V	3000K	16.4 ft	260Lm / ft	2.93W / ft	IP54	80+	1.97" (50mm)


STEL (IP54) 16.4ft Reels include: Attached 3ft lead wire

SINGLE COLOR ACCESSORIES

ITEM NUMBER	DESCRIPTION
WIRE-15-2PIN	15ft (20/2) Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)
LVS-2PIN	In-line Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway



WIRE-15-2PIN



INLINE-SC-CTRL



SPK-REC-5CH



LVS-2PIN




RCWY-PVC-1M

Building a Single Color Trulux System?

See pages (52-53) for compatible single color Trulux controllers

Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Trulux Tape Light

Trulux Single Color Control



Single Zone Push Dial
Wireless RF Wall Controller
SRF-BATT



Trulux RF Receiver
(Required for Trulux Controllers)
REC-5A-4Z